



Modello alimentatore monofase Model single-phase hopper loader		AMS 2	AMS 6	AMS 10	AMS 14
Tensione / Frequenza Voltage / Frequency	V / Hz	230 / 50-60	230 / 50-60	230 / 50-60	230 / 50-60
Potenza del motore Motor power	W	950	950	950	950
Depressione statica Static depression	kPa	21	21	21	21
Pressione aria compressa Compressed air pressure	kPa	/	600 - 800	600 - 800	600 - 800
Consumo aria compressa a ciclo Compressed air consumption cycle	NI	/	6		
Capacità contenitore Container capacity	dm ³	2	6	10	14
Rumorosità max Noise max level	dB (A)	< 80			
Peso Weight	kG	8	12,5	12,8	13,5
Dimensioni (mm) Dimensions (mm)	A	310	408	408	408
	Ø B	40	40	40	40
	Ø C	180	250	250	250
	H	470	540	570	640

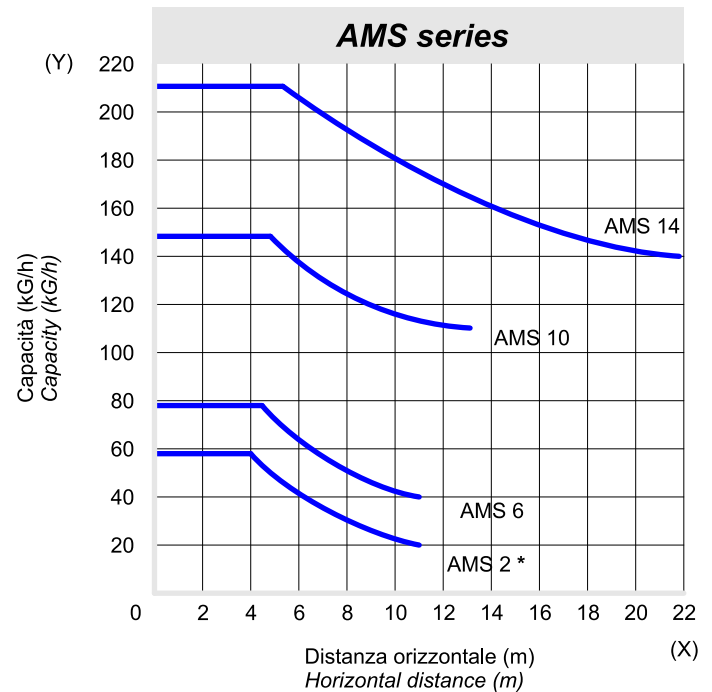

Materiale con p.s.a.: 0,6 kG/dm³ - Distanza verticale: 4m
Material with p.s.a.: 0,6 kG/dm³ - Vertical distance: 4m

Modello valvola proporzionale (optional) Model proportional valve (optional)		VPS 40	VPS 50
Potenza assorbita Absorbed power	W	5	5
Pressione aria compressa Compressed air pressure	kPa	600 - 800	600 - 800
Consumo aria compressa a impulso Compressed air consumption impulse	NI	0,7	
Peso Weight	kG	3,6	3,65
Dimensioni (mm) Dimensions (mm)	A	274	274
	Ø B	40	50
	Ø C	40	50
	D	205	205
	H	196	196

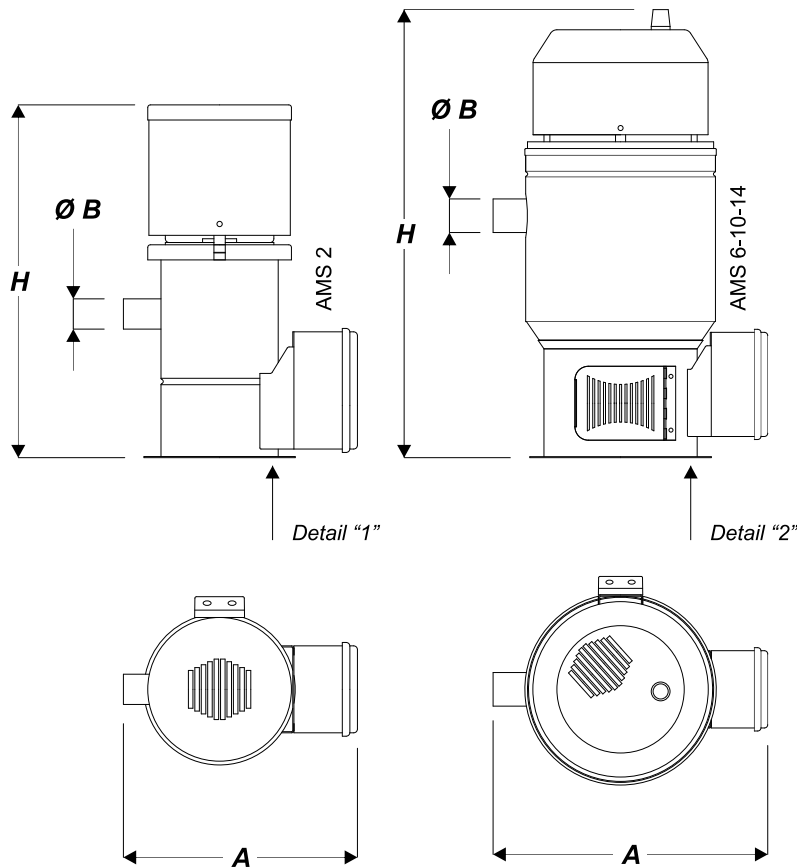