



EC450SXIII


◆外形図 General view

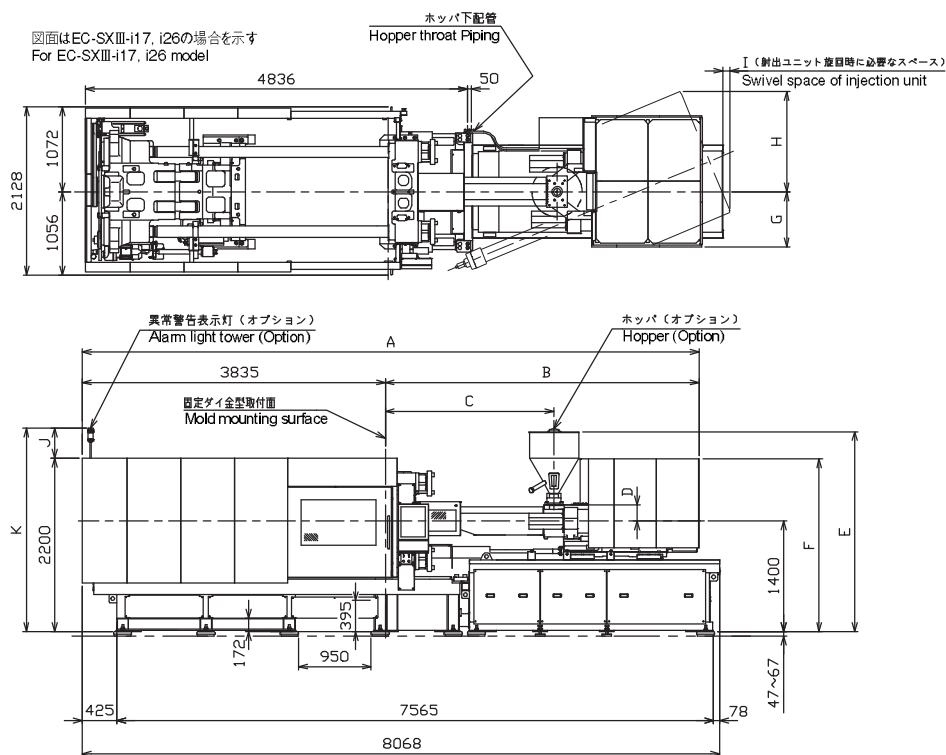

◆取出機取付部 Take-out robot mounting surface

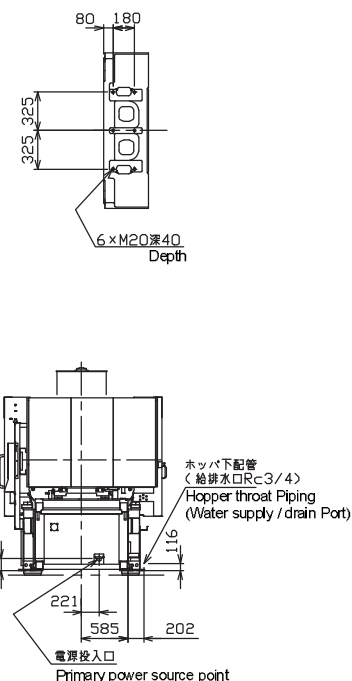

◆金型取付関係図 Mold mounting space

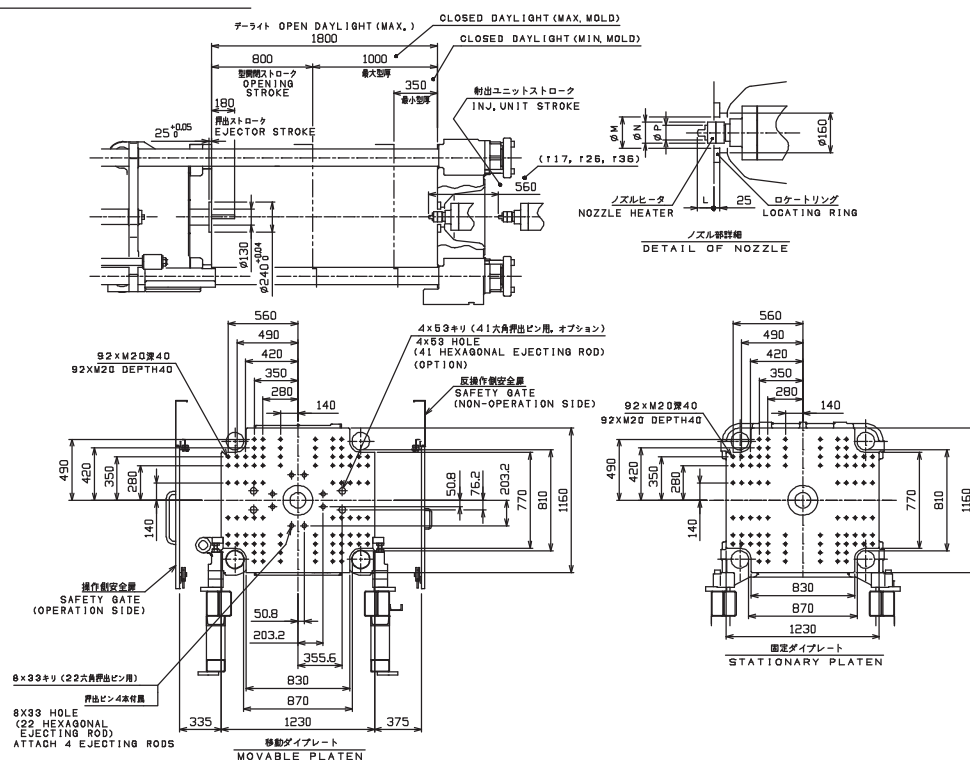

射出ユニット Injection Unit	A	B	C	D	E	F	G	H	I
i17Y	7482	3647	1966	165	2188	2109	692	1441	69
i17AT,B,BH	7687	3852	2171						
i26AT,B	8007	4172	2335	210	2534	2188	696	1269	94
i36AT,B	8522	4687	2540			2322	806	1474	375

異常警告表示灯 (オプション) Alarm light tower (Option)		
段数 Number of stages	J	K
1	378	2578
2	419	2619
3	460	2660

ノズル突出量 (L) NOZZLE PROJECTION	
標準 (STD)	65
選択仕様 (OPTION)	100
	135

ノズルヒーター外径 (N) OUTSIDE DIAMETER OF NOZZLE HEATER	
i17	φ80
i26, i36	φ85

ロケート穴径 (M) LOCATING RING HOLE DIAMETER	
標準 (STD)	φ125 ³⁰⁴⁰
選択仕様 (OPTION)	φ160 ³⁰⁴⁰
	φ200 ³⁰⁴⁰

ノズル外径 (P) OUTSIDE DIAMETER OF NOZZLE	
i17	φ40
i26, i36	φ60